

RAR-240

Trailer Air-Ride Suspensions


For all applications, including severe service



RAR-240 Overslung
25,000 & 30,000 lb. capacities
11½" - 24" ride heights



RAR-240 Underslung
25,000 & 30,000 lb. capacities
5½" - 18" ride heights

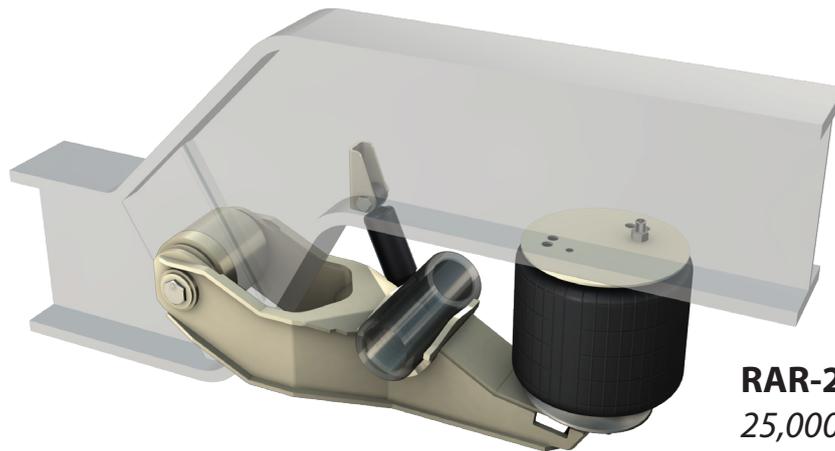

RAR-240 Yoke Mount
25,000 capacity
6" - 9½" ride heights

The ultimate in durability & low maintenance
Accommodates any on/off highway trailer application
Weld-on or bolt-on mounting available




RAR-240

Trailer Air-Ride Suspensions




Longwearing double-bonded pivot bushing can be installed or replaced with common shop tools. No hydraulic press required.

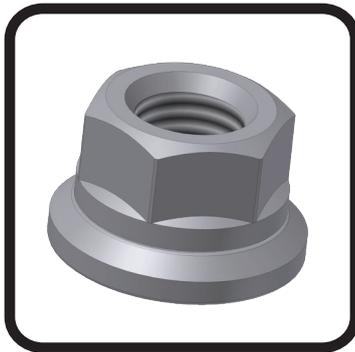


The Securelok™ pivot nut helps to maintain pivot clamping force. This unitized nut, washer, and shim is highly resistant to loosening under vibration.



Clamp for pivot bushing is lockbolted with the Huckbolt® fastening system for consistent, reliable clamp up.

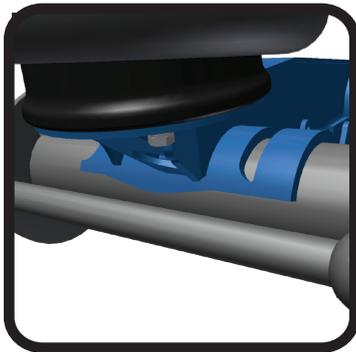

Patented contoured axle seat optimizes axle weldment by decreasing stress concentrations. No u-bolts required.

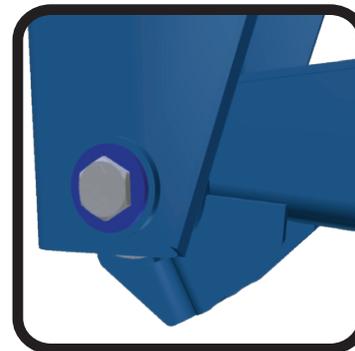

Proven, reliable eccentric bolt allows simple axle alignment by installer and end-user.

Also Available:

Compact low mount for light duty applications (15,000 lb. capacity)

Self-steering unitized system with leading kingpin axle for tridem, quad, & other multi-axle configurations

Lift kits

Factory-integrated Ridewell axle

Vertical bolting flange hangers

U-bolt kits



P.O. Box 4586 ♦ Springfield, Missouri 65808

www.ridewellcorp.com ♦ 800.641.4122 ♦ Fax 417.833.4560