



Trailer Primary Suspension Order Form RAR-244 Model



* = required field

CONTACT INFORMATION

*Company Name _____
Address _____
City _____
State _____
Zip Code _____

*Contact Name _____
Email _____
Office # _____
Mobile # _____

TRAILER INFORMATION

Trailer Type (Choose one) _____
(hotshot, gooseneck, horse / livestock, etc.)

Number of Axles _____
Axle Spacing _____
(Center of axle to center of axle)


DESIRED RIDE HEIGHT

*Ride Height (Inches) _____
or

Frame to Ground Dimension (Inches) - See Figure 1

NOTE: Be sure Trailer is at desired Ride Height when Measuring

Frame to Ground (Inches) _____
Tire Size (i.e. 11R225) _____

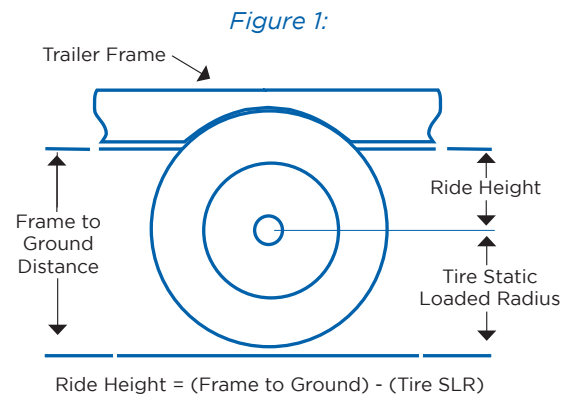

SUSPENSION STYLE

NOTE: All RAR-244 models come with Weld-On hangers and an Underslung suspension style

*Capacity ☐ 8K ☐ 16K

MOST POPULAR HEIGHT CONTROL KITS

Height Control Kit Part #	6330DMAEE20	6241027
Type Suspension	8k Capacity	16k Capacity
Height Control Valve	Low Flow	Low Flow
Pressure Protection Valve	No PPV	Has PPV
Lever or Horizontal Arm	Fixed 5"	Adj. 5" - 7"
Size Vertical Length	7"	12"
Lower Pin Assembly	1/4" x 2.5" L	Custom Shock Mount
Lower Mounting Bracket	Universal	Custom Shock Mount
Type Fitting	Plug 1/4" to 3/8" Reducer	Plug 1/4"

AXLE SPECIFICATIONS

NOTE: Ridewell does not carry or provide axles for RAR-244 suspension models

OPTIONS

Air Compressor Control Kits	3/4 Hp	1/4 Hp
Premium Assembled Kit	☐ Yes	☐ No
Dump Valve	☐ Yes	☐ No
Lift Valve	☐ Yes	☐ No

MOST POPULAR AIR COMPRESSOR KITS FOR RAR-244

PacBrake Air Compressor Control Kits	1220009	1220032	1220033	1220039	1220037	1220041	1220042
Assembled By:	Customer	Customer	Customer	RW	RW	RW	RW
Air Compressor Hp	1/4	1/4 (2)	1/4 (2)	3/4	3/4	3/4	3/4
Manual Push/Pull Dump Valve	-	-	-	-	Yes	-	Yes
Manual Push/Pull Lift Valve	-	-	-	-	-	Yes	Yes
Air Tank- 1175 Cubic In., 8" OB X 27" LG	1	2	1	1	2	2	2
Total Tank Volume	1175ci	2350ci	1175ci	1175ci	2350ci	2350ci	2350ci
Max Combined Rating*	16k	16k	16k	32k	32k	32k	32k

PLEASE NOTE, if adding a dump or lift valve, the ratings listed will be decreased

MOST POPULAR LIFT KIT

Lift Kit Part #	2990153
Type Suspension	Underslung
Minimum Ride Height	5.5"
Hanger Width	Narrow Hanger
Suspension Capacity	16k
Beam Centers	Any
Minimum Axle Spacing	TBD
Where Mounts	Hanger & Beam
Upper Bracket Mounting	Bolt-On
Lower Bracket Mounting	Bolt-On
Pivot Height	4.75"
Type Lift	Standard

**Minimum Axle Spacing for Overslung Suspensions listed is for Drum Brake. Add 3" for Disc Brake applications*

NOTE: Due to space constraints, the RAR-244 Suspension, 8k, does not offer a Lift Kit.