




Dynalastic Drive Truck Suspension Order Form RD-202S Model

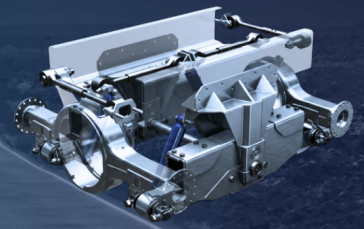

= required field

CONTACT INFORMATION

*Company Name _____
Address _____
City _____
State _____
Zip Code _____

*Contact Name _____
Email _____
Office # _____
Mobile # _____

TRUCK INFORMATION

Truck Type (Choose one) _____
(dump, refuse, fire, logging, etc.)
Truck Length (ft.) _____
Axle Spacing _____

Axle Track ☐ Narrow Only 71.5"
☐ Other (Please specify) _____
Hanger Centers (Beam Centers) ☐ 35" (for 71.5" Track)
☐ Other (Please specify) _____

Number of Axles ☐ Tandem (2 Axles)

DESIRED RIDE HEIGHT


*Ride Height (Inches) _____

or

Frame to Ground Dimension (Inches) - See Figure 1

NOTE: Be sure Truck is at desired Ride Height when Measuring

Frame to Ground (Inches) _____
Tire Size (i.e. 11R225) _____

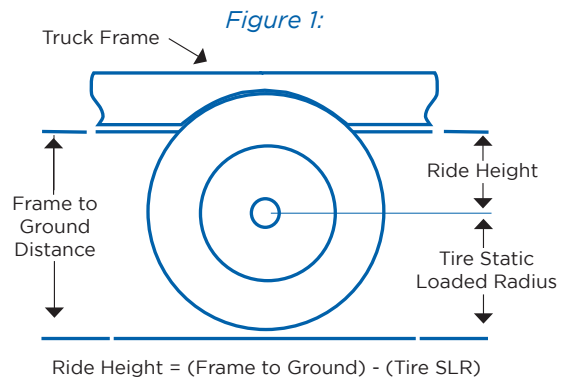

NOTE: For mechanical spring primaries, reduce 'Frame to Ground' by 2" for single axle and 1" for tandem axle

SUSPENSION STYLE

Hanger Mounting ☐ Bolt-On (Only)

Bushing

☐ Traditional One Bolt
☐ Bar Pin Two Bolt

*Capacity ☐ 38K ☐ 60K
☐ 44K ☐ 62K
☐ 48K ☐ 65K
☐ 52K ☐ 72K
☐ 54K ☐ 75K

*Frame Width _____
(Inches) - See Figure 2
(33.5", 34.0", 34.5", 35.0", etc.)

Figure 2:



DISCLAIMER:

This form is for basic information regarding this model of suspension. Please consult Ridewell sales and/or engineering for final specifications and selection of the right Dynalastic RD-202S for your application.