




Truck Self-Steer Auxiliary Suspension Order Form RSS-233 Model



*= required field

CONTACT INFORMATION

*Company Name _____
Address _____
City _____
State _____
Zip Code _____

*Contact Name _____
Email _____
Office # _____
Mobile # _____



TRUCK INFORMATION

*Truck Type ☐ Standard
☐ Roll-off

*Application Type ☐ Tag Axle, Single Drive
☐ Tag Axle, Tandem Drive
☐ Pusher Axle, Single Drive
☐ Pusher Axle, Tandem Drive

Track ☐ Narrow 71.5" (Only)

Type of Primaries ☐ Air Ride
☐ Mechanical Spring

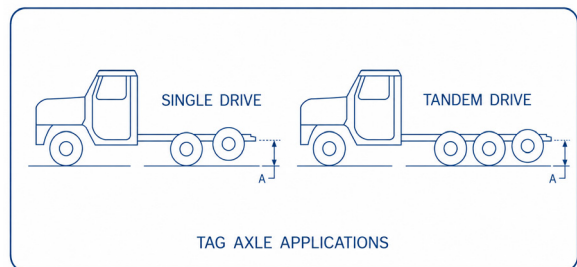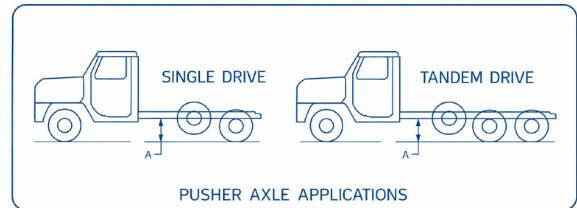

DESIRED RIDE HEIGHT

*Ride Height (Inches) _____

or

Frame to Ground Dimension (Inches) - See Figure 1


NOTE: Be sure Truck is at desired Ride Height when Measuring

Frame to Ground (Inches) _____

Tire Size (i.e. 11R225) _____

Drive Line Clearance (Pusher Only) _____

Figure 1:

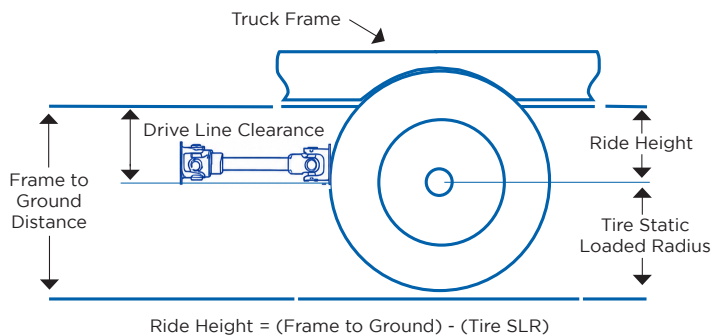

NOTE: For mechanical spring primaries, reduce 'Frame to Ground' by 2" for single axle and 1" for tandem axle

SUSPENSION STYLE

Hanger Mounting | ☐ Bolt-On (Only)

*Capacity

☐ 20K

☐ 13.2K

☐ 10K

*King Pin

☐ Standard (Westport)

☐ Premium (Kaiser)

*Frame Width _____ (Inches) - See Figure 2
(33.5", 34.0", 34.5", 35.0", etc.)

Figure 2:



NOTE:

All RSS-233 models come huck bolted together, except for the 20k Capacity version. It uses regular bolts and comes with shims so the Frame Width settings can be adjusted.

AXLE SPECIFICATIONS

*Brake Type

☐ Drum

☐ Disc

*Lube

☐ Oil (Standard)

☐ Synthetic Oil

☐ Synthetic Grease

*Brake Chambers

☐ Service (Most Popular)

☐ Service with Park

HUB & DRUM TYPE

Suspension Capacity	Brake Type	Hub Brand	Hub Material	Drum Material
20K	Drum	ConMet	Cast Iron	Cast Iron
20K	Disc	ConMet	Aluminum	N/A
13.2K	Drum	Walther	ADI	Cast Iron
13.2K	Disc	Walther	ADI	N/A
10K	Drum	Walther	ADI	Cast Iron

NOTE:

All RSS-233 suspensions come standard without ABS Brakes and Tire Inflation

MOST POPULAR AIR CONTROL KITS

Lift Control Kit Part #	1200039	1200115	1200116	1200228
Operation	Electric	Electric	Electric	Electric
Power Type	Power Down	Power Down	Power Down	Power Down
Mounting	Cab Panel Mount	Loose Valve w/Stainless Pressure Panel	Loose Valve w/Pressure Reg.	Control Box/Enclosure
Notes	Lift in Reverse	Lift in Reverse	Lift in Reverse	Lift in Reverse

NOTE:**Pusher Only:**

$X^* + 3 \frac{1}{2}"$ (axle drop)- Up Travel must be at least $1" > D^*$ - For 6" drop center axles

Pusher Only:

$X^* + 5 \frac{1}{2}"$ (axle drop)- Up Travel must be at least $1" > D^*$ - For 8" drop center axles

*For Axle UP TRAVEL refer to installation drawing of your selected suspension

*Exceptions to "D" may occur based on location of drive line U-joint.

PRE-PLUMBED KITS (OPTIONAL)**Most Popular 'Direct Fit' Pre-Plumb Kits**

Pre-Plumb Kit Part #	1200239	1200267	1200244	1200280	1200278	1200297
Capacity	8k, 10k, 13.2k	13.2k	20k	20k	13.2k	20k
Type Vehicle	Truck	Truck	Truck	Truck	Truck Roll Off	Truck Roll Off
Type Brake	Drum Brake	Disc Brakes	Drum Brake	Disc Brakes	Drum Brake	Drum Brake
Kit Installed or Loose	Installed	Installed	Installed	Installed	Installed	Installed
Size Tank	1300 CI Tank	1300 CI Tank	2200 CU Tank	2200 CI Tank	2200 CI Tank	2200 CU Tank
Lift Axle Control Module	Yes	Yes	Yes	Yes	Yes	Yes