




Truck Non-Steerable Auxiliary Suspension Order Form RUL-245 Model



*= required field

CONTACT INFORMATION

*Company Name _____
Address _____
City _____
State _____
Zip Code _____

*Contact Name _____
Email _____
Office # _____
Mobile # _____



TRUCK INFORMATION

*Truck Type ☐ Standard
☐ Roll-off

*Application Type ☐ Tag Axle, Single Drive
☐ Tag Axle, Tandem Drive
☐ Pusher Axle, Single Drive
☐ Pusher Axle, Tandem Drive

Track ☐ Narrow 71.5" (Only)

Type of Primaries ☐ Air Ride
☐ Mechanical Spring

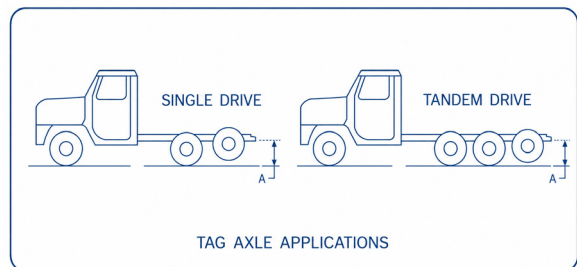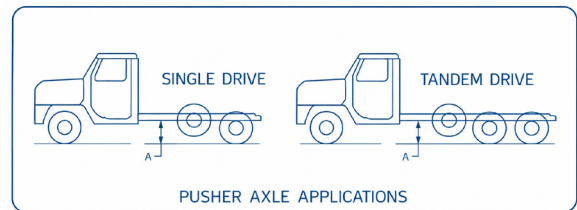

DESIRED RIDE HEIGHT

*Ride Height (Inches) _____

or

Frame to Ground Dimension (Inches) - See Figure 1


NOTE: Be sure Truck is at desired Ride Height when Measuring

Frame to Ground (Inches) _____


Tire Size (i.e. 11R225) _____

Drive Line Clearance (Pusher Only) _____

Figure 1:

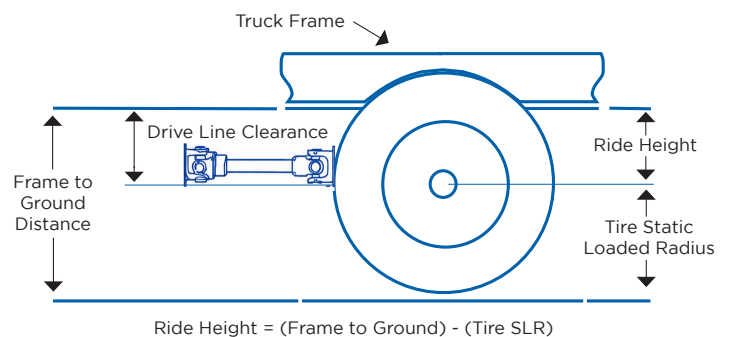

NOTE: For mechanical spring primaries, reduce 'Frame to Ground' by 2" for single axle and 1" for tandem axle

SUSPENSION STYLEHanger Mounting | ☐ Bolt-On (Only)Capacity | ☐ 22.5KFrame Width _____ (Inches) - See Figure 2
(Information only necessary if integrating an axle)*Figure 2:***MOST POPULAR AIR CONTROL KITS**

Lift Control Kit Part #	1200038	1200226
Operation	Manual	Manual
Power Type	n/a	n/a
Mounting	Cab Panel Mount	Control Box / Enclosure

PRE-PLUMBED KITS (OPTIONAL)**Most Popular 'Direct Fit' Pre-Plumb Kit**

Pre-Plumb Kit Part #	1200287
Type Vehicle	Truck
Type Brake	Drum
Kit Installed or Loose	Installed
Type Axle	Straight
Size Tank	1175 CI Tank
Lift Axle Control Module	Yes

NOTE:

Please see the Drum Brake or Disc Brake Axle Order Forms to help select the proper axle (optional)